



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200
Fax 613 632-5246

③

D412-664-203TRN
Job Sheet 202954



Part No: D412-664-203TRN

Job Qty: 1 pcs

Part Name: Crosstube Turning Detail



Part Weight: 0 lbs

Status: New

Priority: Medium

Job Created: 11/5/19

Job Tracking No:

Due Date: 12/12/19

Created By: Marie Lajeunesse

Type: Stock

Description:

Note: D412-664-243 REV F IPP Rev:A 08-03-06 new issue DD verified by:eec IPP Rev B 08.04.02 Removed polish
EC verified by: DD

Ship Via:

Bill of Materials

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		Lead Time	Sign-off
					Setup Hrs	Run Hrs	Workcenter / Supplier			
100	Mori Seiki TL-40 - 1	1 pcs		12/12/19	1.00	2.25	Mori Seiki TL-40 - 1			DAS 66 2019/11/12 9-89
110	QC 2	1 pcs		12/12/19	0.00	0.00	QC 2 - 1			
							QC 2 - 12			
							QC 2 - 14			
							QC 2 - 17			
							QC 2 - 19			
							QC 2 - 2			
							QC 2 - 20			
							QC 2 - 22			
							QC 2 - 23			
							QC 2 - 25			
							QC 2 - 32			
							QC 2 - 33			
							QC 2 - 35			
							QC 2 - 39			
							QC 2 - 4			
							QC 2 - 40			
							QC 2 - 44			
							QC 2 - 45			
							QC 2 - 48			
							QC 2 - 49			
							QC 2 - 50			
							QC 2 - 51			
							QC 2 - 52			
							QC 2 - 57			
							QC 2 - 62			
							QC 2 - 63			
							QC 2 - 8			
							QC 2 - 66			DAS 66 2019/11/12 9-89
							QC 2 - 64			

Plex 11/5/19 2:35 PM Dart.lajeunesse.marie

				QC 2 - 65	
				QC 2 - 5	
				QC 2 - 71	
				QC 2 - 73	
				QC 2 - 69	
120	Mori Seiki TL-40 - 2 - B4B	1 pcs	12/12/19	1.00 3.00	Mori Seiki TL-40 - 1 - B4B
130	QC 2	1 pcs	12/12/19	0.00 0.00	QC 2 - 1
					QC 2 - 12
					QC 2 - 14
					QC 2 - 17
					QC 2 - 19
					QC 2 - 2
					QC 2 - 20
					QC 2 - 22
					QC 2 - 23
					QC 2 - 25
					QC 2 - 32
					QC 2 - 33
					QC 2 - 35
					QC 2 - 39
					QC 2 - 4
					QC 2 - 40
					QC 2 - 44
					QC 2 - 45
					QC 2 - 48
					QC 2 - 49
					QC 2 - 50
					QC 2 - 51
					QC 2 - 52
					QC 2 - 57
					QC 2 - 62
					QC 2 - 63
					QC 2 - 8
					QC 2 - 66
					QC 2 - 64
					QC 2 - 65
					QC 2 - 5
					QC 2 - 71
					QC 2 - 73
					QC 2 - 69
140	QC 8	1 pcs	12/12/19	0.00 0.00	QC 8 - 12
					QC 8 - 14
					QC 8 - 17
					QC 8 - 20
					QC 8 - 25
					QC 8 - 3
					QC 8 - 32
					QC 8 - 33
					QC 8 - 35
					QC 8 - 39
					QC 8 - 4
					QC 8 - 44
					QC 8 - 45
					QC 8 - 49
					QC 8 - 58
					QC 8 - 8
					QC 8 - 9
					QC 8 - 68

DAS

66

9-89

DAS

66

9-89

					QC 8 - 67	
					QC 8 - 1 (A)	
					QC 8 - 47	
					QC 8 - 40	
					QC 8 - 52	
					QC 8 - 23	
					QC 8 - 57	DAS
					QC 8 - 76	76
					QC 8 - 61	9-89
145	Crosstubes - 2 - B4B	1 pcs	12/12/19	0.00 0.25	Crosstubes - 1 - B4B	
					Crosstubes - 2 - B4B	
					Crosstubes - 3 - B4B	
					Crosstubes - 4 - B4B	
150	Handfinish - 1-1 Chemical-B4B	1 pcs	12/12/19	0.00 1.00	Handfinish - 1 - 1 - B4B	
					Handfinish - 1 - 2 - B4B	
					Handfinish - 1 - 3 - B4B	
					Handfinish - 1 - 4 - B4B	
					Handfinish - 1 - 5 - B4B	
					Handfinish - 1 - 6 - B4B	
					Handfinish - 1 - 7 - B4B	
					Handfinish - 1 - 8 - B4B	
					Handfinish - 1 - 9 - B4B	
					Handfinish - 1 - 10 - B4B	
					Handfinish - 1 - 11 - B4B	
					Handfinish - 1 - 12 - B4B	
					Handfinish - 1 - 13 - B4B	
					Handfinish - 1 - 14 - B4B	
					Handfinish - 1 - 15 - B4B	
					Handfinish - 1 - 16 - B4B	
					Handfinish - 1 - 17 - B4B	
					Handfinish - 1 - 18 - B4B	
					Handfinish - 1 - 19 - B4B	
					Handfinish - 1 - 20 - B4B	
					Handfinish - 1 - 21 - B4B	
					Handfinish - 1 - 22 - B4B	
160	QC 7	1 pcs	12/12/19	0.00 0.00	QC 7 - 10	
					QC 7 - 13	
					QC 7 - 14	
					QC 7 - 15	
					QC 7 - 17	
					QC 7 - 18	
					QC 7 - 19	
					QC 7 - 2	
					QC 7 - 28	
					QC 7 - 3	
					QC 7 - 30	
					QC 7 - 34	
					QC 7 - 36	

				QC 7 - 37	
				QC 7 - 41	
				QC 7 - 47	
				QC 7 - 48	
				QC 7 - 51	
				QC 7 - 58	
				QC 7 - 59	
				QC 7 - 60	
				QC 7 - 9	
				QC 7 - 68	
				QC 7 - 50	
				QC 7 - 67	
				QC 7 - 40	
				QC 7 - 24	
				QC 7 - 43	
				QC 7 - 61	
				QC 7 - 81	
				QC 7 - 76	
				QC 7 - 79	
170	Packaging 3-1 - Stock - B4B	1	12/12/19	0.00 0.00	Packaging 3 - 1 - B4B
	pcs				Packaging 3 - 2 - B4B
					Packaging 3 - 3 - B4B
					Packaging 3 - 4 - B4B
					Packaging 3 - 5 - B4B
					Packaging 3 - 6 - B4B
					Packaging 3 - 7 - B4B
					Packaging 3 - 8 - B4B
					Packaging 3 - 9 - B4B
					Packaging 3 - 10 - B4B
					Packaging 3 - 11 - B4B
					Packaging 3 - 12 - B4B
					Packaging 3 - 13 - B4B
					Packaging 3 - 14 - B4B
					Packaging 3 - 15 - B4B
					Packaging 3 - 16 - B4B
					Packaging 3 - 17 - B4B
					Packaging 3 - 18 - B4B
					Packaging 3 - 19 - B4B
					Packaging 3 - 20 - B4B
					Packaging 3 - 21 - B4B
					Packaging 3 - 22 - B4B
					Packaging 3 - 23 - B4B
					Packaging 3 - 24 - B4B
					Packaging 3 - 25 - B4B
					Packaging 3 - 26 - B4B
					Packaging 3 - 27 - B4B
					Packaging 3 - 28 - B4B
					Packaging 3 - 29 - B4B
					Packaging 3 - 30 - B4B
					Packaging 3 - 31 - B4B
					Packaging 3 - 32 - B4B
					Packaging 3 - 33 - B4B
					Packaging 3 - 34 - B4B
					Packaging 3 - 35 - B4B
					Packaging 3 - 36 - B4B
180	QC 21 - SA	1	12/12/19	0.00 0.00	QC 21 - SA - 21
	pcs				QC 21 - SA - 70
					QC 21 - SA - 53

JW 19-12-10

JW 19-12-10

DAS 21 DEC 1 1 2019

Part Op 100 - 1-Fill tube with sand & install plugs 412-203 on both ends as per Folio FA166 2-Face both sides of tube 3-Turn first

Plex 11/5/19 2:35 PM Dart.lajeunesse.marie

Descriptions: taper section on both side as per Folio FA166 4- blend transition lines using belt sander with 60 grit sandpaper

110 - (QC2- Inspect parts off machine FAI/FAIB)

120 - Mori Seiki TL-40 (Mori Seiki CNC Lathe Large) 1-Turn second taper on both sides as per Folio FA166 2- Blend transition lines using belt sander with 60 grit sandpaper. 3- Remove sand and plugs 4-Scribe part # and batch # using vibrating stilus

130 - (QC2- Inspect parts off machine FAI/FAIB)

140 - (QC8- Inspect parts - second check)

145 - GRIND ONLY TRANSITION LINES SMOOTH LONGITUDE WAY.

150 - 1- handfinish X-TUBE INSIDE AND OUT

160 - (QC7-Inspect Chemical Conversion Coat)

170 - (Identify as per dwg & Stock Location: _____) LOCATION : LG014

180 - (QC21- Final Inspection - Work Order Release)

Job BOM

Part / Item	Component Name	Quantity	Operation	Container
D6009-129	Crosstube Material	1 pcs (1 ea)	100-Mori Seiki TL-40 - 1	F139425

Job Allocations

Operation	Component Part	Required	Inventory	Allocated
100-Mori Seiki TL-40 - 1	D6009-129	1	76	0

Part Specifications

Specifications could not be found.



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 813 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Plex 11/5/19 2:35 PM Dart.lajeunesse.marie

Container No: S230971



Part: D412-664-203TRN

Job No: 202954

Serial No/Batch: S230971

Revision: F

Inspector:

Exp Date:

Instructions:

Date: 11/12/19

③

DART AEROSPACE LTD	Work Order:	702954
Description: Crosstube Assembly (412 High Aft)	Part Number:	D412-664-243
Inspection Dwg: D412-664-243 Rev: F		Page 1 of 2


FIRST ARTICLE INSPECTION CHECKLIST

	Inspection Sheet Drawing Dimension	Tolerance	Actual Dimension	Accept	Reject	Method of Inspection	Comments
SIDE A	2.684	+0.005/-0.000	2.689	✓		CNC-04	
	2.748	+0.005/-0.000	2.753	✓		↓	
	2.884	+0.005/-0.000	2.889	✓			
	3.019	+0.005/-0.000	3.024	✓		CNC-05	
	3.163	+0.005/-0.000	3.168	✓		↓	
	3.308	+0.005/-0.000	3.313	✓		↓	
	3.429	+0.005/-0.000	3.433	✓			
	2.990	+0.005/-0.000	2.995	✓		CNC-04	
	2.618	+0.005/-0.000	2.623	✓		"	
	0.200	+/-0.010	.200	✓		CNC-08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		"	
	4.971	+/-0.030	4.972	✓		CNC-08	
SIDE B	2.684	+0.005/-0.000	2.689	✓		CNC-04	
	2.748	+0.005/-0.000	2.753	✓		↓	
	2.884	+0.005/-0.000	2.889	✓			
	3.019	+0.005/-0.000	3.024	✓		CNC-05	
	3.163	+0.005/-0.000	3.168	✓		↓	
	3.308	+0.005/-0.000	3.313	✓		↓	
	3.429	+0.005/-0.000	3.433	✓			
	2.990	+0.005/-0.000	2.995	✓		CNC-04	
	2.618	+0.005/-0.000	2.623	✓		"	
	0.200	+/-0.010	.198	✓		CNC-08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		"	
	4.971	+/-0.030	4.969	✓		CNC-08	
	124.100	+/-0.020	124.08	✓		Tape	

3

DART AEROSPACE LTD		Work Order: <u>200954</u>
Description: Crosstube Assembly (412 High Alt)		Part Number: D412-664-243
Inspection Dwg: D412-664-243 Rev: F		Page 2 of 2

WALL THICKNESS MEASUREMENT

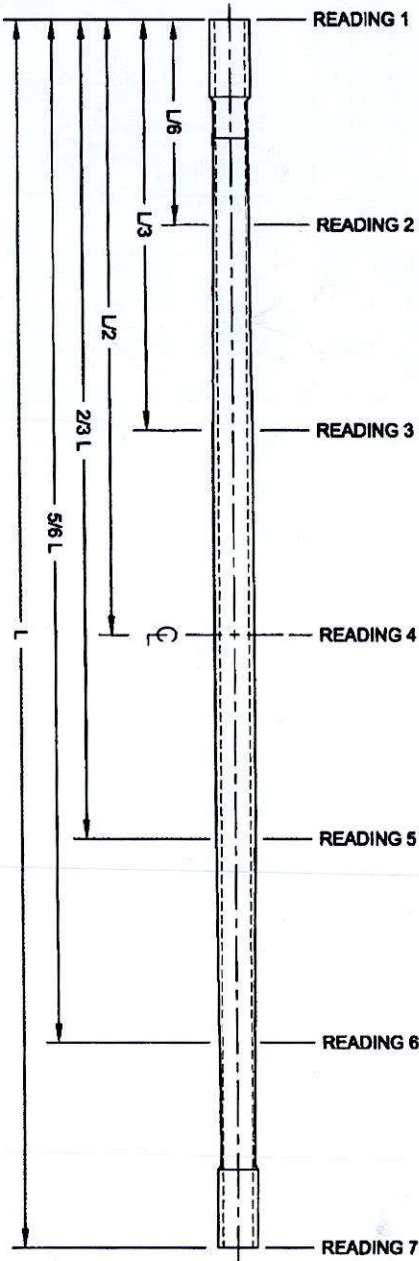

Location	WALL THICKNESS MEASUREMENT (IN)				Deviation Δw (max-min)	TOLERANCE
	w1	w2	w3	w4		
READING 1 L= 0"	.375	.369	.360	.371	.015	0.073"
READING 2 L= 20.683	.305	.306	.300	.301	.006	
READING 3 L= 41.367	.506	.479	.443	.477	.063	
READING 4 L= 62.050	.634	.625	.617	.628	.017	
READING 5 L= 82.733	.488	.498	.470	.456	.042	
READING 6 L= 103.417	.307	.314	.301	.288	.026	
READING 7 L= 124.100	.374	.369	.353	.358	.021	

Calibration Result

DAS 76 DAS 9-89 76
Actual Block Thickness: 100-750
Silescan 250 Measured Thickness: 100-750

Measured by: 66	Audited by: 9-85	Preliminary Approval:
Date: <u>2019/11/19</u>	Date: <u>2019/11/19</u>	Date:

Rev	Date	Change	Revised by	Approved
A	04.06.16	New Issue (P/O D412-664-203)	KJ/JLM	
B	06.03.09	Dwg Rev updated	KJ/JLM	
C	07.05.08	Tolerance updated for dimension 4.971	KJ/JLM	
D	10.02.02	Dimension 124.100 was 124.09	KJ	
E	12.06.04	Wall thickness form added	KJ	
F	14.06.24	Dwg Rev updated	KJ	

Item	Qty -243	Part Number	Description
1	X	D412-664-243	CROSSTUBE ASSEMBLY (412 HIGH AFT)
2	1	D6009-129	CROSSTUBE
3	2	D3595-063-570	RUBBER CUSHION
4	1	D2896-1	SUPPORT
5	2	D3189-1	CHAFING SHIELD
7	4	MS21920-28	CLAMP
8	2	MS21920-30	CLAMP (OR MS21920-32)
9	A/R	SCOTCH-WELD DP460	EPOXY ADHESIVE, 3M SCOTCH-WELD
10	A/R	PROSEAL 890 B-2	SEALANT

GENERAL NOTES:

- 1) MATERIAL: MANUFACTURED FROM D6009-129
FINISHED LENGTH = 124.100±0.020 (BEFORE BENDING)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME INSIDE AND OUTSIDE PER DART QSI 005 4.2
MASK UNDERSIDE OF CROSSTUBE AS SHOWN (ZN C6-2, HATCHED AREA)
PAINT OUTSIDE PER DART QSI 005 4.2
AFTER PAINTING, REMOVE MASKING AND APPLY MATTE CLEAR COAT
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED.
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED.
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX.
- 6) IDENTIFICATION: DART P/N "D412-664-243" AND B/N ON INSIDE OF CUFF PER QSI 044 6.4 (VIBRATING STYLUS)
- 7) WEIGHT: 47.0 lbs
- 8) PART IS SYMMETRIC ABOUT CENTERLINE.
- 9) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE. DO NOT GRIND TUBE AFTER SHOT PEEN.

TURNING

- 10) WHEN TRANSITIONING TO STOCK MAT'L, RUN CUTTER OFF PART. BLEND OUT EDGE LONGITUDINALLY. TRANSITION SHOULD BE SMOOTH.

BENDING

- 11) BEND PROGRESSIVELY WITH A MINIMUM OF 8 PASSES. MAXIMUM TUBE FLATTENING DUE TO BENDING IS 7% (BASED ON O.D.) IN LOWER HALF OF R30 BEND AND 6% (BASED ON O.D.) ON REMAINING TUBE.
- 12) LIQUID PENETRANT INSPECT OUTSIDE SURFACE OF CROSSTUBE PER QSI 038. TO BE PERFORMED AFTER FINAL POST-BEND GRINDING. ANY ADDITIONAL GRINDING REQUIRES ANOTHER LPI INSPECTION.

ASSEMBLY

- 13) INSTALL D2896-1 CENTER SUPPORT USING A 0.04" TO 0.07" THICK LAYER OF SCOTCH-WELD DP460 PER QSI 015.
- 14) INSTALL MS21920-30 CLAMPS (OR -32) WITH D3595-063-570 RUBBER CUSHIONS TO SECURE THE D2896-1 SUPPORT ON TOP SIDE OF THE CROSSTUBE. ENSURE CLAMPS ARE ON TOP SIDE OF CROSSTUBE.
- 15) APPLY A THIN COAT OF PROSEAL 890 ON INSIDE CONCAVE SURFACE OF D3189-1 CHAFING SHIELD AND LET CURE PER MANUFACTURER'S INSTRUCTIONS. INSTALL PROSEALED D3189-1 CHAFING SHIELD ONTO CROSSTUBE BY APPLYING A THIN COAT OF PROSEAL 890 ONTO CROSSTUBE. BE SURE TO ELIMINATE ANY AIR GAPS.
- 16) TORQUE CLAMPS ON D2896-1 SUPPORT 80 TO 100 IN-LB. TORQUE CLAMPS ON D3189-1 CHAFING SHIELD 40 TO 50 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING. PRIOR TO PACKAGING, RE-CHECK TORQUE ON CLAMPS AFTER ADHESIVES HAVE CURED FOR 24 HOURS.

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 202954 MCT
19-1105




RELEASED
2014-05-26

F	NOTES RE-ORDERED, SCOTCH-WELD WAS MAGNOBOND (C6-1), ADD CLAMP RETORQUE (A8-1), REMOVE ABRASION STRIP, ADD INSPECTION WINDOW (C6-1), CHAFING SHIELD NOW 4.38 WIDE (C6-2), ADD 7% CRUSHING (B8-1), CHG BEND HEIGHT TOL. TO ±0.25 (C1-3), CHG CUFF TOL. (D2-4), CLAMPS FLIPPED TO PREVENT CHAFING (B7-2, B7-3), INCORP. DEO E-2/4	CP	14.04.01
E	REFORMAT/REVISE GENERAL NOTES; REORGANIZED VIEWS AND REFORMATTED DRAWING TO CURRENT STANDARDS; RELOCATED FLAG #6 PER PAR 08-046 (ZN A5-3); ADD TOLERANCE (ZN B6-3, C4-3, C8-3 & C5-3); MOVED TURNING DETAIL & UPDATED TOLERANCE TO SHEET 4.	RF	09.09.30
D	REMOVE D2732-058, CHANGE TO D3595-063-570	PH	07.03.09
C	REMOVE D2856-600-1087, ADD D2732-058 & MAGNOBOND 6398, MS21920-32 WAS MS21920-30	MB	06.10.27
B	ADD HOLES FOR COMPATABILITY WITH BHTAA SKIDTUBES	PH	05.02.04
A	NEW ISSUE	PH	01.10.17
REV.	DESCRIPTION	BY	DATE
DESIGN			
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	14.04.01		

DART AEROSPACE LTD
HAWKESBURY, ONTARIO, CANADA

DRAWING NO. REV. F
D412-664-243 SHEET 1 OF 4
TITLE SCALE
CROSSTUBE ASSEMBLY (412 HI AFT) NTS


COPYRIGHT © 2001 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIES OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD

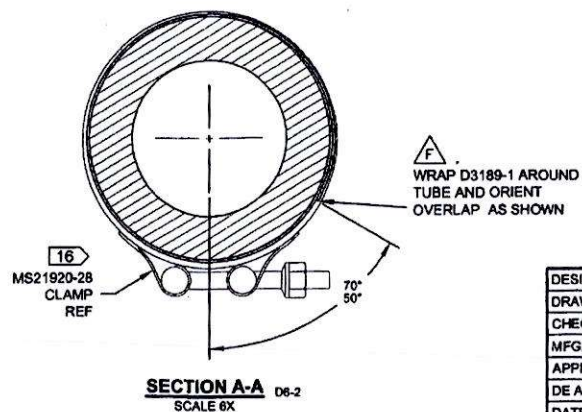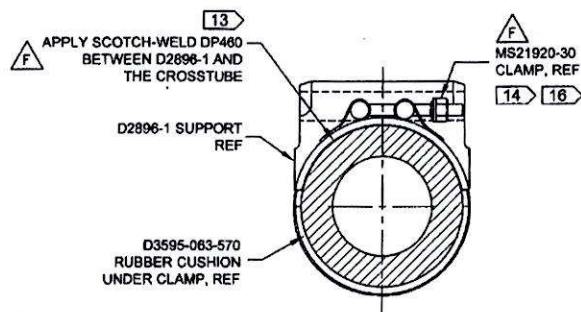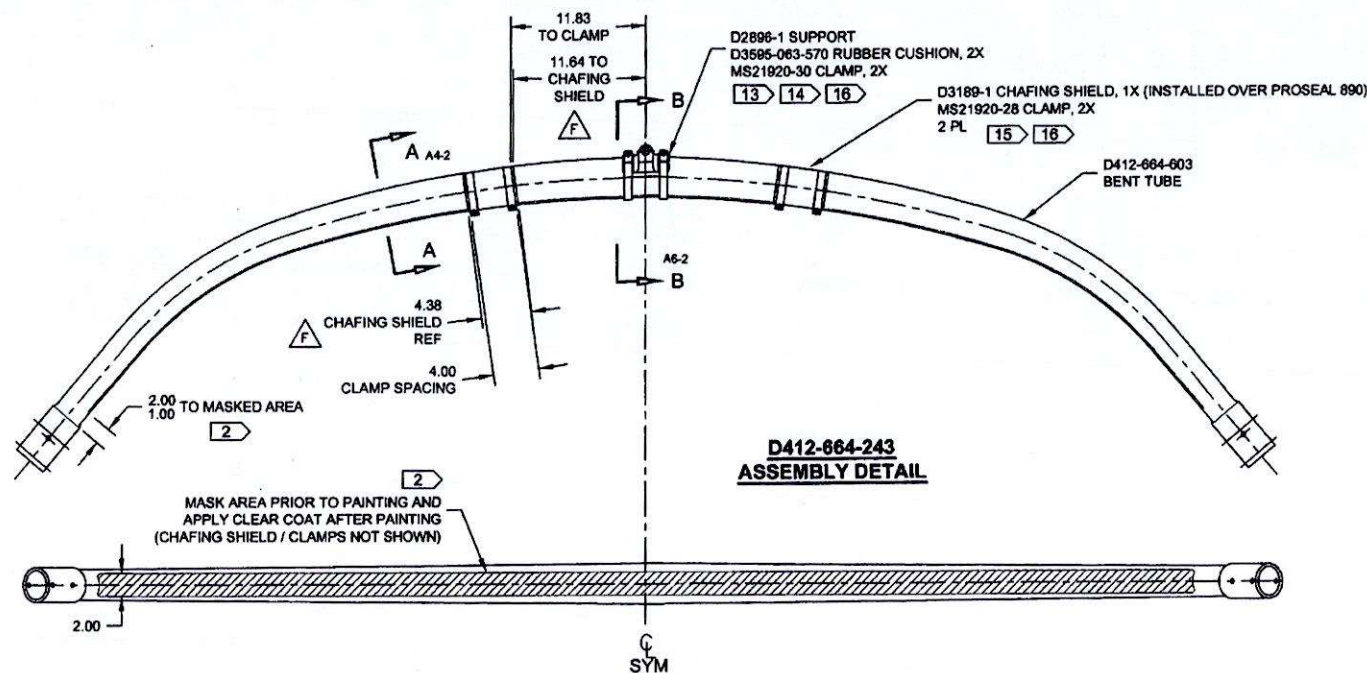


RELEASED
2014-05-26

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO. D412-664-243	REV. F
MFG. APPR.			SHEET 2 OF 4
APPROVED		TITLE	SCALE
DE APPR.		CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR TRANSMITTED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	


8 7 6 5 4 3 2 1

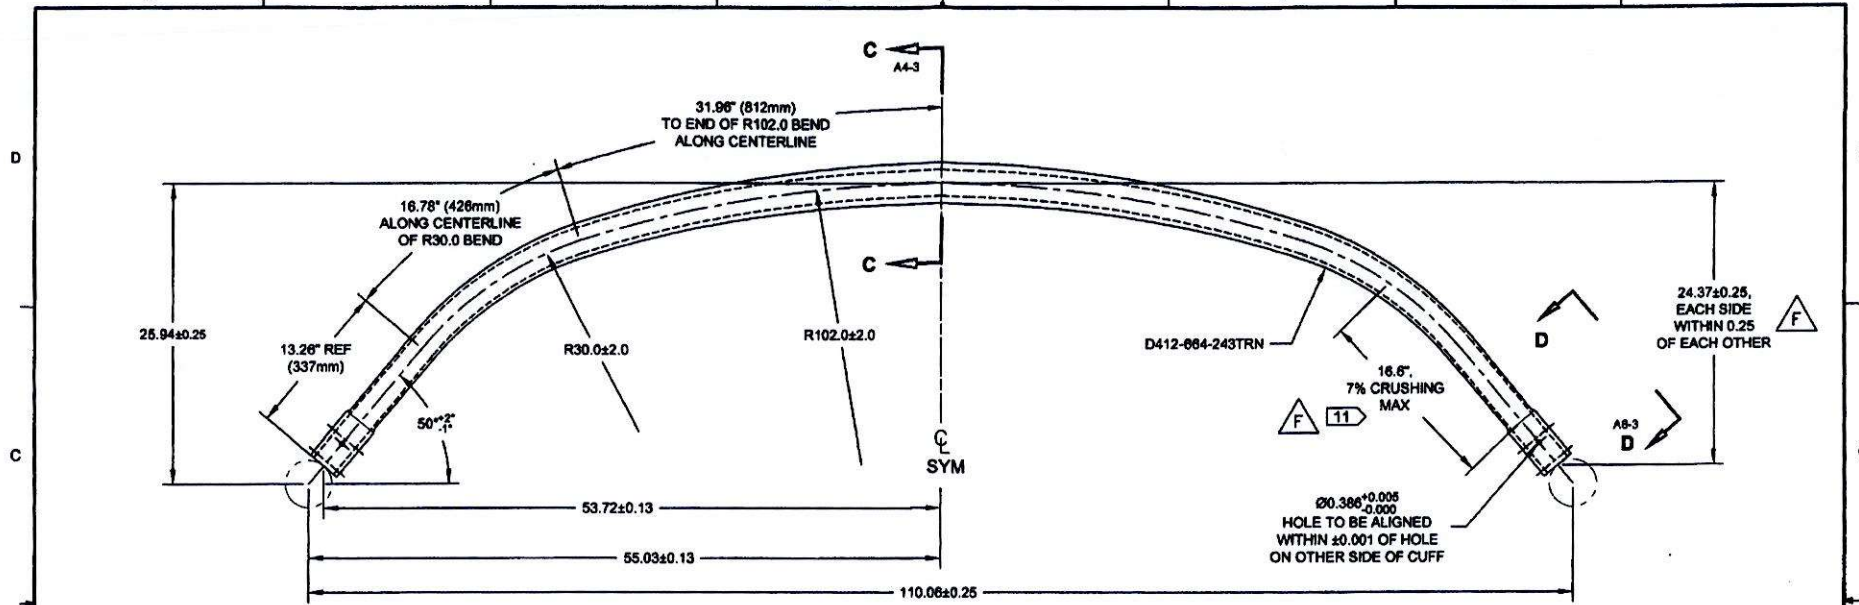

D412-664-603
BENDING AND DRILLING DETAIL

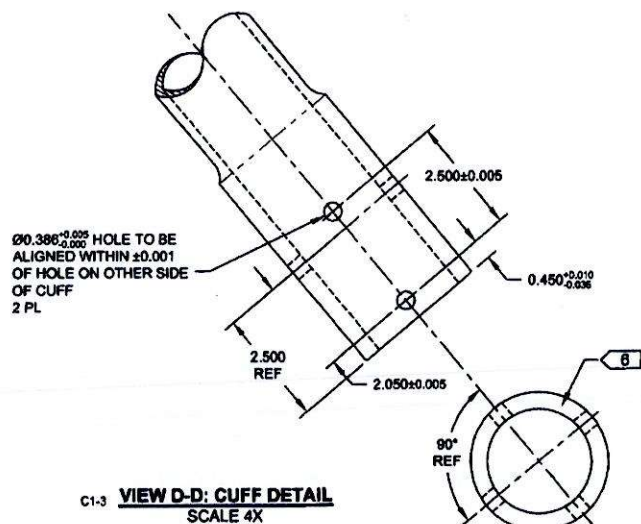

C1-3 VIEW D-D: CUFF DETAIL
SCALE 4X




SECTION C-C D6-3
SCALE 4X


RELEASED
2014-05-26

DESIGN	<i>DP</i>	DART AEROSPACE LTD	
DRAWN	<i>DP</i>	HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>DP</i>	DRAWING NO.	REV. F
MFG. APPR.	<i>DP</i>	D412-664-243	SHEET 3 OF 4
APPROVED	<i>DP</i>	TITLE	SCALE
DE APPR.	<i>DP</i>	CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COPIED OR REPRODUCED IN ANY MANNER WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	


8 7 6 5 4 3 2 1

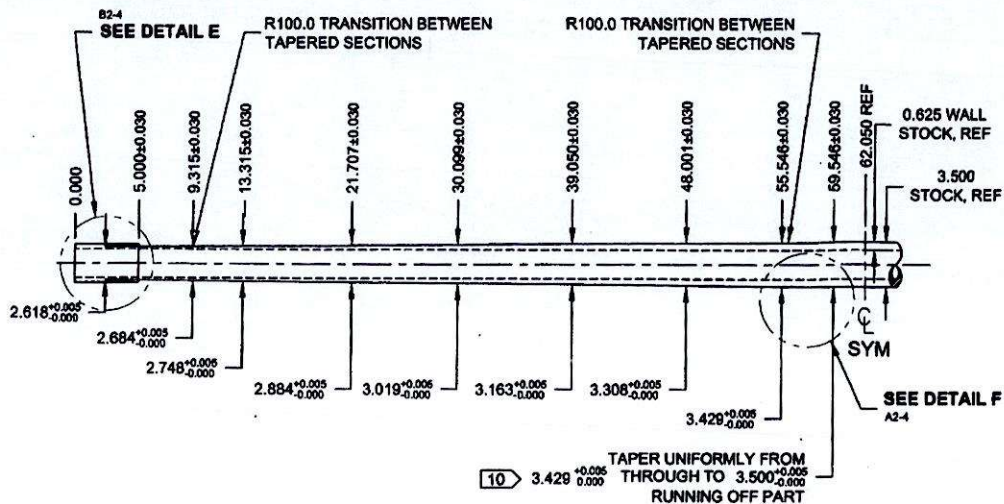


D412-664-243TRN
TURNING DETAIL

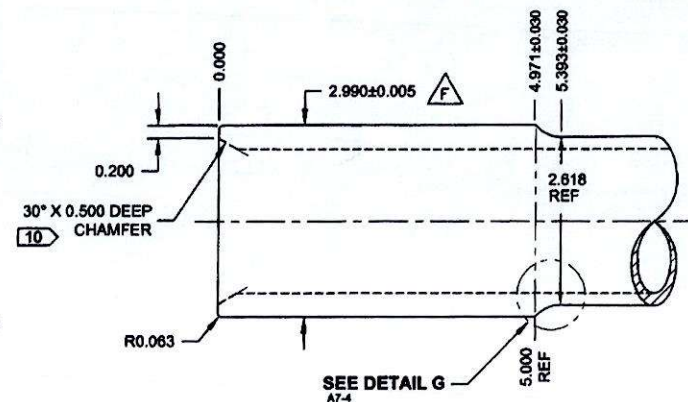

DETAIL E:
CROSSTUBE CUFF
SCALE 5X



DETAIL G:
CUFF TRANSITION
SCALE 10X

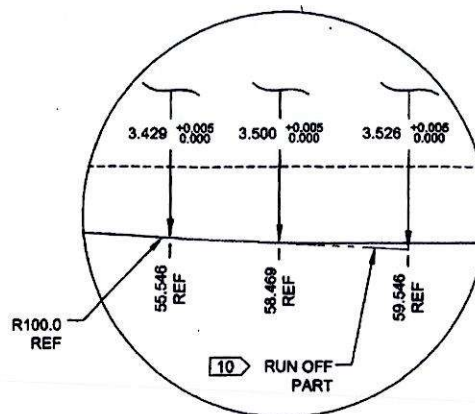

DETAIL F:
TAPER RUN-OFF
NOT TO SCALE

RELEASED
2014-05-26

DESIGN	<i>92</i>	DART AEROSPACE LTD	
DRAWN	<i>92</i>	HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>92</i>	DRAWING NO.	REV. F
MFG. APPR.	<i>92</i>	D412-664-243	SHEET 4 OF 4
APPROVED	<i>92</i>	TITLE	SCALE
DE APPR.	<i>92</i>	CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

Entered: _____ Date: _____



WORK ORDER NON-CONFORMANCE / ROUTE UPDATE

NCR No. _____

Route update only ☐

Job: _____ Part No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐	DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Eng. (Non-AW) ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Engineering ☐ Water Jet ☐ Supplier ☐ Quality ☐			
Date :	Sequence #:	QTY Affected :		MRB (QSI042)	
Description Work Order Deviation		Disposition		Completed By	
				Lead hand / Supervisor	
Root Cause Operator ☐ Manufacturing Process ☐ Equip/Tooling ☐ Handling/Presservation ☐ Material ☐ Product Improvement ☐ Process Improvement ☐ Human Factors ☐		FAULT CATEGORY ☐ Pressure/Forced ☐ Bending ☐ Crushing ☐ Cracks ☐ Crimp/Kink/Ripple/Wave/Twist ☐ Marks/Chatter ☐ Mislabeled ☐ Contamination ☐ Misaligned/off center ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Incomplete/Unclear Instructions ☐ Drill Holes ☐ Fit/Function ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain Direction ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set/Set-up ☐ Positioned Wrong ☐ Outside Tolerance ☐ Drawing ☐ Finish ☐ Part Lost/Missing ☐ Misread			
Other/Details:					